

Solenne 360/175 LED 3000K


Solenne is designed by Kauppi & Kauppi and includes a total of seven lighting fixtures, all with generous matt opal glass shades and black or white glazed porcelain bases. Four of the fixtures follow our traditional range for ceiling, wall, and facade with IP44 ratings suitable for both indoor and outdoor installations. The collection also includes three more novel types of lighting fixtures, taking our pressed porcelain to new indoor contexts. Solenne includes a grand pendant with a corresponding porcelain ceiling cup, a new table luminaire with a wooden base, and Ifö Electric's very first floor lamp.

EAN / GTIN	7312901844366
E-number	7512310
Article no.	84431-830-16
Type designation	51831/LED



Specification

Material	Porcelain
Base colour	Black (NCS S 9000-N)
Glass	Matt opalglas
Glass thread (mm)	184 mm
Glass gasket	Silicone
Weight	3,8 kg
Diameter (mm)	360
Height (mm)	176
Lamp holder	LED
Light source	LED Module, 17W
Effect	17W
Lumen, light source	2500lm
Colour temperature	3000K
MacAdam	3 SDCM
Life span	LED module L80/B10: 100 000h (Power Supply 50 000h)
Ra	Min 90
Lighting control	Require CASAMBI ADD-ON.
Rated voltage	230V
Dimmable	No. Require CASAMBI ADD-ON to be dimable.
IP class	IP44
Insulation class	I
Energy class	C
D class	No
IK class	IK02
Ta	-30 - +25
Installation	Ceiling/wall
CC measurement (mm)	70, 101
Knock out opening	3
Cable inlet	Bottom inlet
Bridging	Yes
Surface mounted cable	Yes
Connection	Terminal block
Family	Solenne
Design	Kauppi & Kauppi

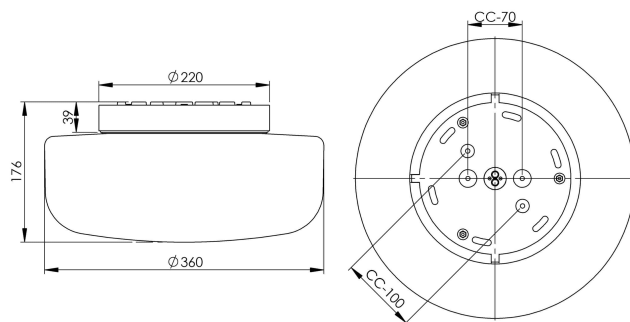

Maintenance

Disconnect the luminaire. Remove the shade and clean it. Do not use cleaning agents containing solvents. Change the light source if necessary. Check the gasket and change it if necessary. Replace the shade.

Spare parts

Shade Solenne 360/175, Article no.: 1-6166-30
 Gasket silicone for bayonett 184mm, Article no.: 1-03397
 CASAMBI ADD-ON device for LED module ON/OFF, Article no.: 1-6342
 Power supply ON/OFF 9-20W for type 18262/LED, 51831/LED, 51833/LED, Article no.: 1-6343

If the luminaire is modified the person responsible for the modification shall be considered manufacturer. Subject to errors in text. We reserve the right to change the technical specifications (without notice).